

# Flush-mount wall frame and frame holders for 4 double elements white Simon 500 Cima

Ref.: 51010104-030

#### **BASIC INFORMATION**

Series Simon 500 Cima

Version 4 double elements

Number of modules 8

Finish White

Available in 1, 2, 3, 4 and 6 double elements

KIT availability Sí

Compatibility Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using specific

adaptors), combinable with the Simon Trunking range

Packaging contents

Flush-mount wall frame, frame holders, metal partition wall, ground

connection cable and installation manual

Remarks Alternatively, you can screw the frame holders into the box if additional

fastening is required.

2



### **Technical information**

Dimensions 284 x 164 mm

Depth 21 mm

Heat resistance +125 °C (in accordance with standard IEC 60695-10-2)

Extinguishing +850 °C / 30 seconds (GWFI in accordance with

standard IEC 60695-2-11)

Insulation

resistance >5MOhms at 500V

Dielectric No holes or contours, with 2000V at 50 Hz for 1

strength minute

Electromagnetic
immunity for

Secured by installing the metal partition wall in the

VDM wiring housing fitted into the box for this purpose.

IP rating 4X

IK Classification 7

RAL 9003

Manufacturing Halogen-free thermoplastic that guarantees no

material flame propagation in case of fire and low toxicity in

case of smoke emission.

Type of product Standard

Market available CE

## Regulations

Regulations Directive 2014/35/UE LVD + EN 60670-1:2005

#### Installation and maintenance

Installation type Suitable for flush mounting on the wall

Type of fastening

By direct snap-fit in the selected box (no tools

needed for fastening)

Installation Vertical, corresponding with the direction of the

direction mechanisms

Installable in

flush mount Specific Simon 500 Cima

junction box

Removal of the

frame Only with tool



Removal of Components Only with tool

Recess dimension 141 x 262 mm

Distance

between flush

mount boxes for 22 mm

optimum alignment

Temperature

range during -5 to 60 °C

installation


Max. temp. during +90 °C


construction

work

Maintenance Clean with a soft, dry cloth. Do not use abrasive

cloths or cleaning products that contain chlorine.

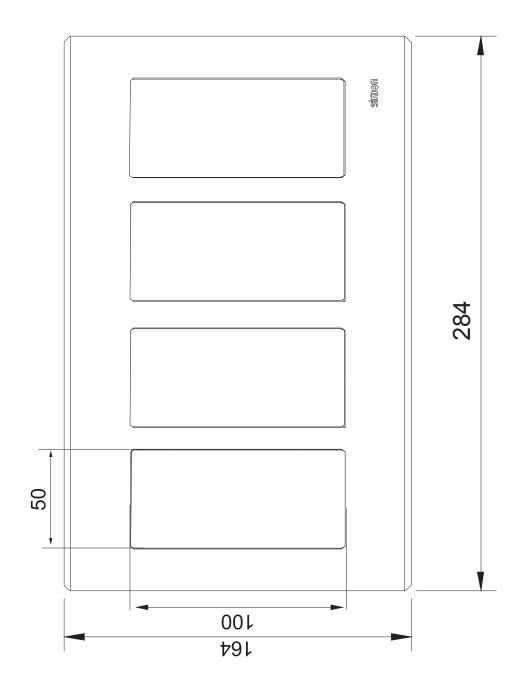





www.simonelectric.com



Diputación, 390-392 08013 Barcelona (Spain) Tel.: +34 93 547 81 81